




STOP the Pavement Deterioration Process with **Dura-Fill** Hot Pour Crack Sealants

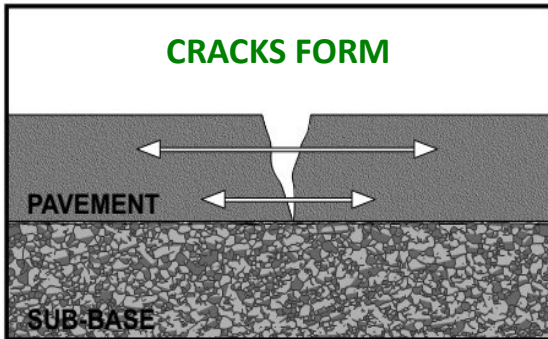


If crack sealant is NOT applied, water penetrates through the crack into the pavement base. The water softens and washes away the pavement base causing a loss of support for the pavement structure.

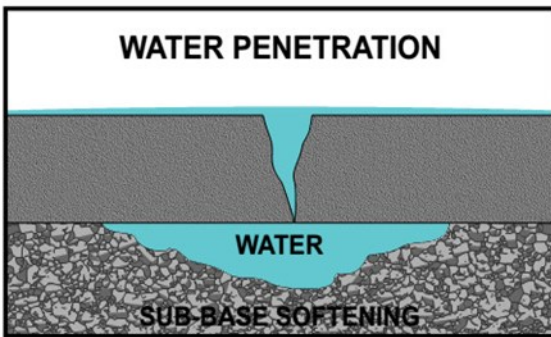

Vehicles compress the pavement downward causing water erosion to the base and underside of the pavement. Stress points are created as the pavements' support system is eroded. Further pavement deterioration occurs; causing alligator cracking or potholes.

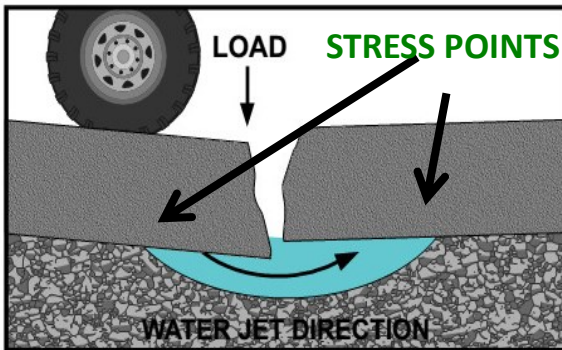


CRACK SEALANT IS APPLIED

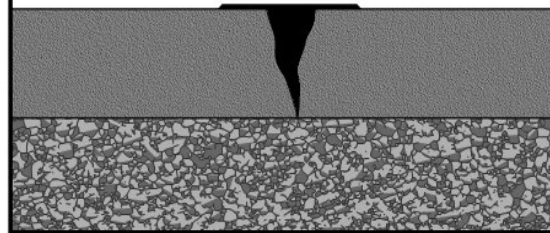

> As an economical and effective preventative maintenance treatment, **Dura-Fill** hot applied crack sealants

prolong pavement life by sealing cracks and joints from water penetration.

Dura-Fill is available in formulas for cold climates and can withstand repeated freeze/thaw cycles where crack movement is most damaging. Specialty formulas of **Dura-Fill** & **Dura-Shell** provide high softening points to prevent tracking in hot climates and area with high foot traffic.

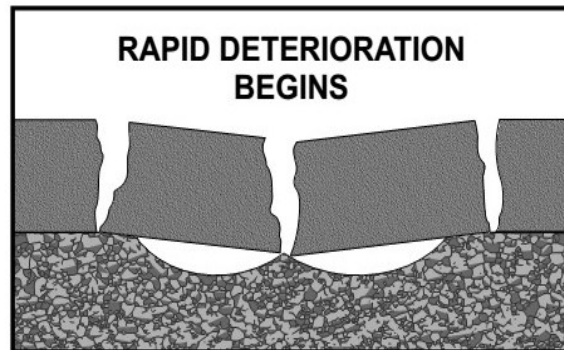

P&T Products, Inc.

Manufacturer of Hot Pour Crack & Joint Sealants

472 Industrial Pkwy
Sandusky, OH 44870
877-690-4093
Www.P-TProductsInc.com